
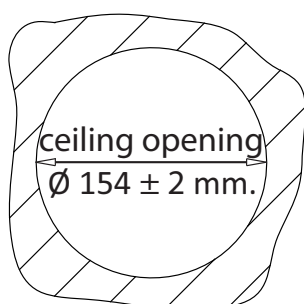
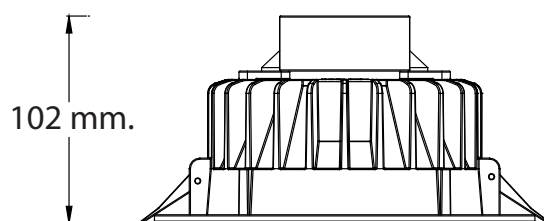


LED DOWNLIGHT 6" 15W DL-15x-01A

Equipped by 33 high performance LED with excellent thermal design.
Uniform and soft light emission. Essential design, simple and elegant.
Low power consumption. Output comparable with 2x18W CFL lamps.
Low working temperature helps to keep lower room temperature
Sturdy aluminium housing. White painted front rim.

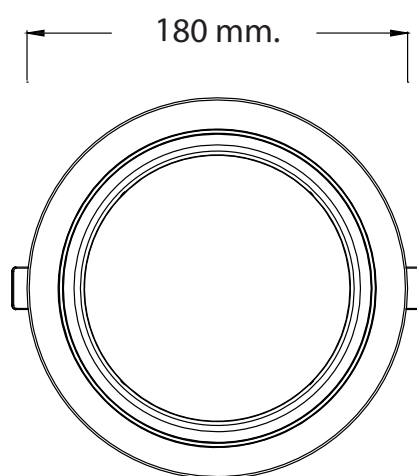

- Ecologically friendly.
- Low heat emission.
- Low energy consumption.
- No UV, IR, mercury and other harmful materials.
- Long lifespan.
- Easy to install and maintain.
- No flickering & FR interference.
- No ignition delay.

- General Light - spot lights
- Bar - club -restaurant
- Shop windows
- Home - Office
- Interior Design

LED DOWNLIGHT 6" 15W DL-15x-01A



Environmental Specification

Parameter	Rating
Humidity	85% max.
Storage Temperature	-20° ~ 50°C
Operating Temperature	-15° ~ 50°C
Surface Temperature	<50°C

Power Supply Specification

Parameter	Rating
Input Voltage	100~240VAC
Input Voltage Range	90~264VAC
Power Factor	>0,9
Power Consumption	15W

Photometry

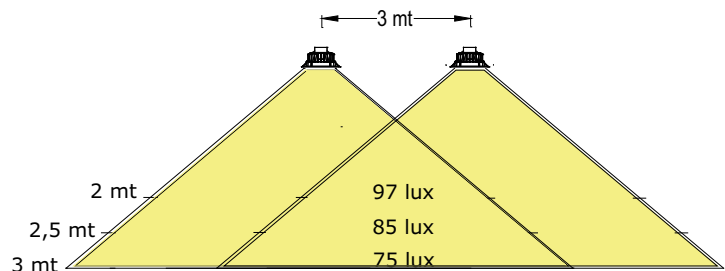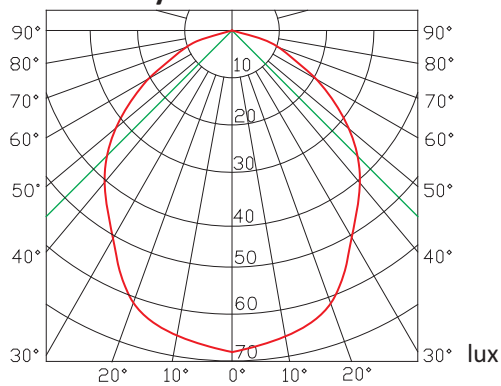

data from test on DL-15WC-01A

file IES available.

Intensity distribution @ 3 meters

angle	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°
lux	69	67	60	50	40	32	20	10	6	4

Ordering information:

Part Number	White LED Colour	Radiation Angle	Colour Temperature		CRI %	Luminous Flux typ.	Illuminance @ 1 mt.
			min.	max.			
DL-15W-01A	Warm	90°	2800K	3800K	80	1000 lm	430 lux
DL-15N-01A	Neutral	90°	3500K	4500K	80	1100 lm	490 lux
DL-15C-01A	Cold	90°	5000K	7000K	80	1100 lm	490 lux

