
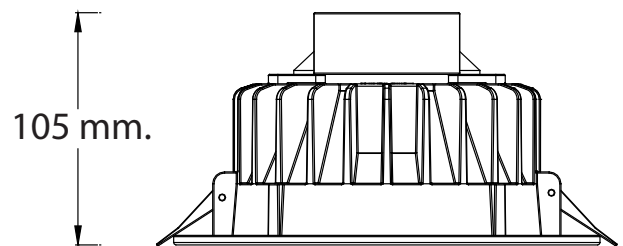
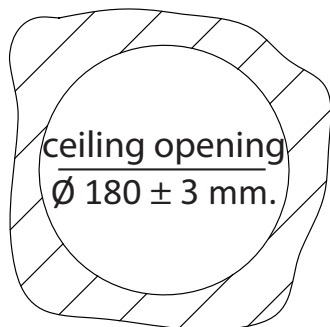


## LED DOWNLIGHT 8" 25W DL-25x-01A

Equipped by 55 high performance LED with excellent thermal design.  
Uniform and soft light emission. Essential design, simple and elegant.  
Low power consumption. Output comparable with 2x28W CFL lamps.  
Low working temperature helps to keep lower room temperature  
Sturdy aluminium housing. White painted front rim.

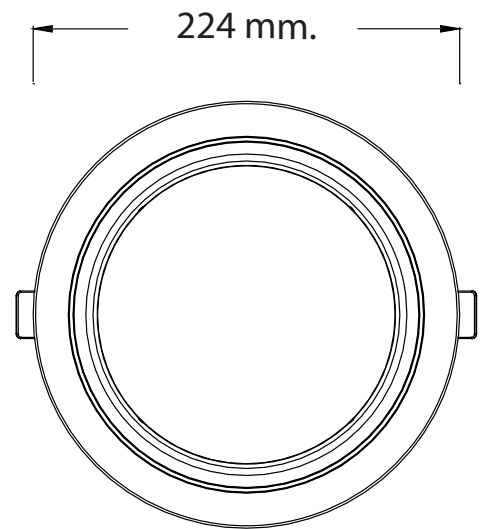

- Ecologically friendly.
- Low heat emission.
- Low energy consumption.
- No UV, IR, mercury and other harmful materials.
- Long lifespan.
- Easy to install and maintain.
- No flickering & FR interference.
- No ignition delay.

- General Light - spot lights
- Bar - club -restaurant
- Shop windows
- Home - Office
- Interior Design

## LED DOWNLIGHT 8" 25W DL-25x-01A



### Environmental Specification

Parameter	Rating
Humidity	85% max.
Storage Temperature	-20° ~ 60°C
Operating Temperature	-15° ~ 50°C
Surface Temperature	<50°C

### Power Supply Specification

Parameter	Rating
Input Voltage	100~260VAC
Input Voltage Range	90~264VAC
Power Factor	>0,9
Power Consumption	25W

### Photometry

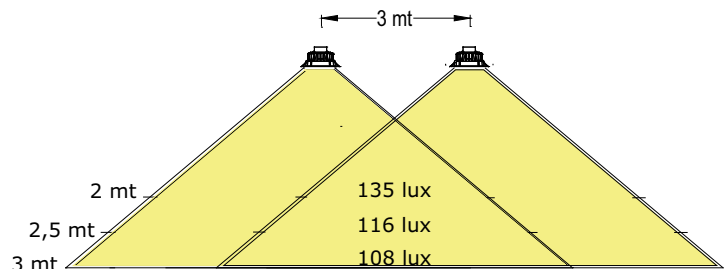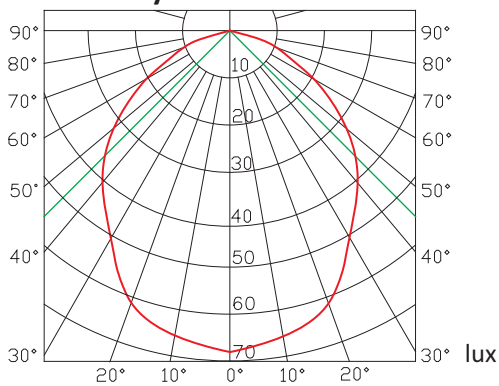

file IES available.

### Intensity distribution @ 3 meters

angle	0°	10°	20°	30°	40°	50°	60°	70°	80°	90°
lux	91	89	82	71	58	45	28	15	9	6

### Ordering information:

Part Number	White LED Colour	Radiation Angle	Colour Temperature	CRI %	Luminous Flux typ.	Illuminance @ 1 mt.
DL-25W-01A	Warm	90°	3000K±300	85	1600 lm	745 lux
DL-25N-01A	Neutral	90°	4300K±300	85	1750 lm	783 lux
DL-25C-01A	Cold	90°	5700K±300	85	1750 lm	783 lux

